



# MAX-8

Excellent Performances & Reliability

FD18/25/35

FG18/25/35

T8 series 1.5–3.5t forklift

EP EQUIPMENT CO.,LTD  
[www.paleciaki.info](http://www.paleciaki.info)

  
**Let's grow together**

CE

# CPC(Q)D15/18T8

## T8 series 1.5-1.8t forklift specification

		EP									
General	1	Manufacture									
	2	Model		CPCD15T8-S4Q2	CPCD15T8-NB485BPG	CPQD15T8-GK21	CPCD18T8-S4Q2	CPCD18T8-NB485BPG	CPQD18T8-GK21		
	3	Power type		Diesel	Diesel	Gasoline	Diesel	Diesel	Gasoline		
Characteristics & Dimensions	4	Rated capacity		Kg	1500	1500	1500	1800	1800	1800	
	5	Load center		mm	500	500	500	500	500	500	
	6	Lift height		mm	3000	3000	3000	3000	3000	3000	
	7	Free lift height		mm	120	120	120	120	120	120	
	8	Fork size		L×W×T	mm	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35
	9	Mast tilt range		F/R	deg	6/12	6/12	6/12	6/12	6/12	6/12
	10	Fork overhang(wheel center to fork face)		mm	420	420	420	420	420	420	
	11	Rear overhang		mm	420	420	420	420	420	420	
	12	Overall dimensions	Length to face of fork		mm	2230	2230	2230	2230	2230	2230
	13		Overall width		mm	1080	1080	1080	1080	1080	1080
	14		Mast lowered height		mm	1995	1995	1995	1995	1995	1995
	15		Mast extended height		mm	3960	3960	3960	3960	3960	3960
	16		Overhead guard height		mm	2070	2070	2070	2070	2070	2070
	17	Turning radius(outside)		mm	1995	1995	1995	2035	2035	2035	
	18	Min.right angle stacking aisle width (Add load length and clearance )		mm	2400	2400	2400	2440	2440	2440	
	Performance	19	Travel (No load)		Km/h	14	14	14	14	14	14
		20	Speed		Lifting (Full load)	mm/sec	460	460	460	460	460
		21	Lowering (Full load)		mm/sec	450	450	450	450	450	450
22		Max.Drawbar Pull (Full load)		N	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	
23		Max.Gradeability (Full load)		%	20	20	20	20	20	20	
Chassis	24	Tyres		Front	mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	
	25	Rear		mm	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	
	26	Tread		Front	mm	920	920	920	920	920	
	27	Rear		mm	920	920	920	920	920	920	
	28	Wheelbase		mm	1430	1430	1430	1430	1430	1430	
	29	Ground clearance		Lowest	mm	110	110	110	110	110	
	30	Wheelbase center		mm	145	145	145	145	145	145	
Weight	31	Self weight		Kg	2700	2700	2700	2900	2900	2900	
	32	Full load		Front	kg	3570	3570	3570	3995	3995	
	33	Rear		kg	630	630	630	705	705	705	
	34	Distribution		Front	kg	1215	1215	1215	1305	1305	
	35	No load		Rear	kg	1485	1485	1485	1595	1595	
Power & transmission	36	Battery		V/AH	12/60	12/60	12/60	12/60	12/60	12/60	
	37	Modal			S4Q2	NB485BPG	GK21	S4Q2	NB485BPG	GK21	
	38	Manufacture			Mitsubishi	CHINA	GCT	Mitsubishi	CHINA	GCT	
	39	Rated output/r.p.m		kw	32.9/2500	30/2600	31.2/2250	32.9/2500	30/2600	31.2/2250	
	40	Rated torque/r.p.m		N.m	135/2000	131/1800	143.7/1600	135/2000	131/1800	143.7/1600	
	41	No.of cylinder			4	4	4	4	4	4	
	42	Bore×Stroke		mm	88×103	85X100	89×83	88×103	85X100	89×83	
	43	Displacement		cc	2505	2270	2065	2505	2270	2065	
	44	Fuel tank capacity		L	50	50	50	50	50	50	
	45	Manufacture			CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	
	46	Type			Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	
	47	Stage		FWD/RVS	1/1	1/1	1/1	1/1	1/1	1/1	
	48	Operating pressure		For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5

1. Special lifting height available ( 2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m )

2. Attachment available.

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

# CPC(Q)D20/25T8

## T8 series 2.0-2.5t forklift specification

			EP												
General	1	Manufacture													
	2	Model		CPCD30T8-S4S	CPCD30T8-C490	CPCD30T8-A498	CPCD30T8-C240	CPCD30T8-TD27	CPQD30T8-GK25	CPCD35T8-S4S	CPCD35T8-A498	CPCD35T8-TD27	CPQD35T8-GK25		
	3	Power type		Diesel	Diesel	Diesel	Diesel	Diesel	Gasoline	Diesel	Diesel	Diesel	Gasoline		
	4	Rated capacity		Kg	3000	3000	3000	3000	3000	3000	3500	3500	3000	3500	
Characteristics & Dimensions	5	Load center		mm	500	500	500	500	500	500	500	500	500		
	6	Lift height		mm	3000	3000	3000	3000	3000	3000	3000	3000	3000		
	7	Free lift height		mm	120	120	120	120	120	120	120	120	120		
	8	Fork size		L×W×T	mm	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×50	1070×125×50	1070×125×45	1070×125×50	
	9	Mast tilt range		F/R	deg	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12		
	10	Fork overhang(wheel center to fork face)		mm	481	481	481	481	481	481	486	486	481	486	
	11	Rear overhang		mm	590	590	590	590	590	590	590	590	590		
	12	Overall dimensions	Length to face of fork		mm	2762	2762	2762	2762	2762	2822	2822	2762	2822	
	13		Overall width		mm	1200	1200	1200	1200	1200	1200	1200	1200	1200	
	14		Mast lowered height		mm	2070	2070	2070	2070	2070	2070	2070	2070	2070	
	15		Mast extended height		mm	4210	4210	4210	4210	4210	4210	4210	4210	4210	
	16	Overhead guard height		mm	2180	2180	2180	2180	2180	2180	2180	2180	2180		
	17	Turning radius(outside)		mm	2450	2450	2450	2450	2450	2450	2510	2510	2450	2510	
	18	Min.right angle stacking aisle wiath (Add load length and clearance)		mm	2950	2950	2950	2950	2950	2950	3010	3010	2950	3010	
Performance	19	Travel (No load)		Km/h	20	20	20	20	20	20	20	20	20		
	20	Speed		mm/sec	400	400	400	400	400	400	400	400	400		
	21	Lowering (Full load)		mm/sec	400	400	400	400	400	400	400	400	400		
	22	Max.Drawbar Pull (Full load)		N	21000	21000	21000	21000	21000	21000	21500	21500	21000	21500	
	23	Max.Gradeability (Full load)		%	20	20	20	20	20	20	20	20	20	20	
Chassis	24	Tyres	Front	mm	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR		
	Rear		mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR			
	25	Tread	Front	mm	1010	1010	1010	1010	1010	1010	1010	1010	1010		
	26		Rear	mm	980	980	980	980	980	980	980	980	980		
	27	Wheelbase		mm	1700	1700	1700	1700	1700	1700	1760	1760	1700	1760	
	28	Ground clearance	Lowest	mm	140	140	140	140	140	140	140	140	140		
	29		Wheelbase center	mm	175	175	175	175	175	175	175	175	175		
Weight	30	Self weight		Kg	4450	4450	4450	4450	4450	4700	4700	4450	4700		
	31	Weight Distribution	Full load	Front	6488	6488	6488	6488	6488	7134	7134	6488	7134		
	32			Rear	962	962	962	962	962	1066	1066	962	1066		
	33		No load	Front	1810	1810	1810	1810	1810	1927	1927	1810	1927		
	34			Rear	2640	2640	2640	2640	2640	2773	2773	2640	2773		
Power & transmission	35	Battery		V/AH	12/60	12/80	12/80	12/80	12/80	12/60	12/60	12/80	12/60		
	36	Engine	Modal		S4S-DPEU2	C490BPG-25	A498BT1-39	C240	TD27	GK25	S4S-DPEU2	A498BT1-39	TD27	GK25	
	37		Manufacture		Mitsubishi	CHINA	CHINA	ISUZU	GCT	GCT	Mitsubishi	CHINA	GCT	GCT	
	38		Rated output/r.p.m		kw	35.3/2250	36.8/2650	36.8/2400	34.5/2500	38.5/2300	37.4/2300	35.3/2250	36.8/2400	38.5/2300	37.4/2300
	39		Rated torque/r.p.m		N.m	177/1700	156/1700-1900	186/1600-1800	139/1800	160/2300	176.5/1600	177/1700	186/1600-1800	160/2300	176.5/1600
	40		No.of cylinder			4	4	4	4	4	4	4	4	4	
	41		Bore×Stroke		mm	94×120	90×105	95×105	86×102	96/92	89×100	94×120	95×105	96/92	89×100
	42		Displacement		cc	3331	2670	2980	2369	2663	2488	3331	2980	2663	2488
	43		Fuel tank capacity		L	70	60	70	70	60	70	75	70	60	75
	44		Manufacture			CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
	45		Type			Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
	46	Stage		FWD/RVS		1/1	2/2	2/2	1/1	1/1	1/1	1/1	2/2	1/1	1/1
	47	Operating pressure		For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	

1. Special lifting height available ( 2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m. 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m )

2. Attachment available.

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

# CPC(Q)D30/35T8

## T8 series 3.0-3.5t forklift specification

			EP										
1	Manufacture												
2	Model			CPCD20T8-S4S	CPCD20T8-C490	CPCD20T8-C240	CPCD20T8-TD27	CPQD20T8-GK25	CPCD25T8-C490	CPCD25T8-S4S	CPCD25T8-C240	CPCD25T8-TD27	CPCD25T8-GK25
3	Power type			Diesel	Diesel	Diesel	Diesel	Gasoline	Diesel	Diesel	Diesel	Diesel	Gasoline
4	Rated capacity		Kg	2000	2000	2000	2000	2000	2500	2500	2500	2500	2500
5	Load center		mm	500	500	500	500	500	500	500	500	500	500
6	Lift height		mm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
7	Free lift height		mm	120	120	120	120	120	120	120	120	120	120
8	Fork size		L×W×T	mm	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40
9	Mast tilt range		F/R	deg	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12
10	Fork overhang(wheel center to fork face)			mm	476	476	476	476	476	476	476	476	476
11	Rear overhang			mm	485	485	485	485	485	550	550	550	550
12	Overall dimensions	Length to face of fork	mm	2610	2610	2610	2610	2610	2660	2660	2660	2660	2660
13		Overall width	mm	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150
14		Mast lowered height	mm	2050	2050	2050	2050	2050	2050	2050	2050	2050	2050
15		Mast extended height	mm	4200	4200	4200	4200	4200	4200	4200	4200	4200	4200
16		Overhead guard height	mm	2130	2130	2130	2130	2130	2130	2130	2130	2130	2130
17	Turning radius(outside)			mm	2170	2170	2170	2170	2170	2230	2230	2230	2230
18	Min.right angle stacking aisle wiath (Add load length and clearance			mm	2680	2680	2680	2680	2680	2740	2740	2740	2740
19	Speed	Travel (No load)	Km/h	20	20	20	20	20	20	20	20	20	20
20		Lifting (Full load)	mm/sec	450	450	450	450	450	450	450	450	450	450
21		Lowering (Full load)	mm/sec	450	450	450	450	450	450	450	450	450	450
22	Max.Drawbar Pull (Full load)		N	17500	17500	17500	17500	17500	17500	17500	17500	17500	17500
23	Max.Gradeability (Full load)		%	20	20	20	20	20	20	20	20	20	20
24	Tyres	Front	mm	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR
25		Rear	mm	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR
26	Tread	Front	mm	970	970	970	970	970	970	970	970	970	970
27		Rear	mm	970	970	970	970	970	970	970	970	970	970
28	Wheelbase		mm	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
29	Ground clearance	Lowest		mm	120	120	120	120	120	120	120	120	120
30		Wheelbase center		mm	145	145	145	145	145	145	145	145	145
31	Self weight		Kg	3580	3580	3580	3580	3580	3920	3920	3920	3920	3920
32	Weight Distribution	Full load	Front		4856	4856	4856	4856	4856	5588	5588	5588	5588
33			Rear		724	724	724	724	724	832	832	832	832
34		No load	Front		1428	1428	1428	1428	1428	1560	1560	1560	1560
35			Rear		2152	2142	2142	2142	2142	2360	2360	2360	2360
36	Battery		V/AH	12/60	12/80	12/80	12/80	12/60	12/80	12/60	12/60	12/60	12/60
37	Modal			S4S-DPEU2	C490BPG-25	C240	TD27	GK25	C490BPG-25	A498BT1-39	C240	TD27	GK25
38	Manufacture			Mitsubishi	CHINA	ISUZU	GCT	GCT	CHINA	Mitsubishi	ISUZU	GCT	GCT
39	Rated output/r.p.m		kw	35.3/2250	36.8/2650	34.5/2500	38.5/2300	37.4/2300	36.8/2650	35.3/2250	34.5/2500	38.5/2300	37.4/2300
40	Rated torque/r.p.m		N.m	177/1700	156/1700-1900	139/1800	160/2300	176.5/1600	156/1700-1900	177/1700	139/1800	160/2300	176.5/1600
41	No.of cylinder			4	4	4	4	4	4	4	4	4	4
42	Bore×Stroke		mm	94×120	90×105	86×102	96/92	89×100	90×105	94×120	86×102	96/92	89×100
43	Displacement		cc	3331	2670	2369	2663	2488	2670	3331	2369	2663	2488
44	Fuel tank capacity		L	60	60	60	60	60	60	60	60	60	60
45	Manufacture			CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
46	Type			Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
47	Stage		FWD/RVS	1/1	2/2	1/1	1/1	1/1	2/2	1/1	1/1	1/1	1/1
48	Operating pressure		For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1. Special lifting height available ( 2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m )

2. Attachment available.

3. The parameters in the table are of the standard model. For more information, please contact us.

4. Specification are subject to change without notice.

**1.5-1.8t T8 series mast: (pneumatic)**

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	1.5t	1.8t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												1.5t	1.8t	1.5t	1.8t	
mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg			
Wide view mast	2W200	2000	1495	2585	2955	120	120	420	420	6	12	1500	1800	1500	1800	
	2W250	2500	1745	3085	3455	120	120	420	420	6	12	1500	1800	1500	1800	
	2W270	2700	1845	3285	3655	120	120	420	420	6	12	1500	1800	1500	1800	
	2W300	3000	1995	3585	3955	120	120	420	420	6	12	1500	1800	1500	1800	
	2W330	3300	2145	3885	4255	120	120	420	420	6	12	1500	1800	1500	1800	
	2W350	3500	2245	4085	4455	120	120	420	420	6	12	1500	1800	1500	1800	
	2W360	3600	2295	4185	4555	120	120	420	420	6	12	1500	1800	1500	1800	
	2W400	4000	2545	4585	4955	120	120	420	420	6	12	1400	1700	1500	1800	
	2W430	4300	2695	4885	5255	120	120	420	420	6	6	1300	1600	1400	1700	
	2W450	4500	2795	5085	5455	120	120	420	420	6	6	1250	1500	1350	1600	
wide view full 2-stage mast	2F250	2500	1790	3105	3455	1045	765	420	420	6	12	1500	1800	1500	1800	
	2F270	2700	1890	3305	3655	1145	865	420	420	6	12	1500	1800	1500	1800	
	2F300	3000	2040	3605	3955	1345	1105	420	420	6	12	1500	1800	1500	1800	
	2F330	3300	2190	3905	4255	1495	1165	420	420	6	12	1500	1800	1500	1800	
	2F360	3600	2340	4205	4555	1645	1315	420	420	6	12	1500	1800	1500	1800	
	2F400	4000	2540	4605	4955	1815	1565	420	420	6	12	1400	1700	1500	1800	
wide view full 3-stage mast	3F430	4300	1965	5070	5255	1425	1080	440	440	6	6	1250	1500	1350	1600	
	3F450	4500	2045	5130	5465	1485	1140	440	440	6	6	1200	1400	1300	1500	
	3F480	4800	2160	5445	5755	1575	1230	440	440	6	6	1100	1300	1200	1400	
	3F500	5000	2210	5605	5955	1665	1320	440	440	6	6	1050	1200	1150	1300	
	3F550	5500	2375	6120	6455	1825	1480	440	440	3	6	/	/	950	1100	
	3F600	6000	2600	6695	6955	1975	1630	440	440	3	6	/	/	750	900	

Note:1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

**2.0-2.5t T8 series mast: (pneumatic)**







Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	2.0t	2.5t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												2.0t	2.5t	2.0t	2.5t	
mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg			
Wide view mast	2W200	2000	1555	2740	3420	120	120	476	476	6	10	2000	2500	2000	2500	
	2W250	2500	1805	3040	3720	120	120	476	476	6	10	2000	2500	2000	2500	
	2W270	2700	1905	3240	3920	120	120	476	476	6	10	2000	2500	2000	2500	
	2W300	3000	2055	3540	4220	120	120	476	476	6	10	2000	2500	2000	2500	
	2W330	3300	2205	3690	4370	120	120	476	476	6	10	2000	2500	2000	2500	
	2W350	3500	2305	3890	4570	120	120	476	476	6	10	2000	2500	2000	2500	
	2W360	3600	2355	3990	4670	120	120	476	476	6	10	2000	2500	2000	2500	
	2W400	4000	2605	4040	4720	120	120	476	476	6	10	1900	2300	2000	2500	
	2W430	4300	2755	4340	5020	120	120	476	476	6	6	1800	2100	1950	2450	
	2W450	4500	2855	4290	4970	120	120	476	476	6	6	1700	2000	1900	2400	
wide view full 2-stage mast	2F250	2500	1785	2090	2770	1210	560	476	476	6	10	2000	2500	2000	2500	
	2F270	2700	1885	2290	2970	1310	660	476	476	6	10	2000	2500	2000	2500	
	2F300	3000	2035	2590	3270	1460	810	476	476	6	10	2000	2500	2000	2500	
	2F330	3300	2185	3840	4520	1610	960	476	476	6	10	2000	2500	2000	2500	
	2F360	3600	2335	4140	4820	1760	1110	476	476	6	10	2000	2500	2000	2500	
	2F400	4000	2585	4540	5220	2060	1410	476	476	6	10	1900	2300	2000	2500	
wide view full 3-stage mast	3F430	4300	2035	4880	5560	1360	730	490	490	6	6	1700	2000	1900	2400	
	3F450	4500	2115	5040	5720	1460	810	490	490	6	6	1600	1900	1800	2300	
	3F480	4800	2220	5345	6020	1565	915	490	490	6	6	1500	1700	1700	2100	
	3F500	5000	2305	5540	6220	1610	960	490	490	6	6	1400	1600	1600	2000	
	3F550	5500	2555	6120	6800	1770	1120	490	490	3	6	1050	1200	1500	1800	
	3F600	6000	2805	6540	7220	2020	1370	490	490	3	6	700	800	1400	1600	

Note:1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

**3.0-3.5t T8 series mast: (pneumatic)**

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	3.0t	3.5t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												3.0t	3.5t	3.0t	3.5t	
mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg			
Wide view mast	2W200	2000	1520	2570	3250	120	120	481	486	6	12	3000	3000	3500	3500	
	2W250	2500	1770	3070	3750	120	120	481	486	6	12	3000	3000	3500	3500	
	2W270	2700	1875	3270	3950	120	120	481	486	6	12	3000	3000	3500	3500	
	2W300	3000	2025	3570	4250	120	120	481	486	6	12	3000	3000	3500	3500	
	2W330	3300	2145	3690	4370	120	120	481	486	6	12	3000	3000	3500	3500	
	2W350	3500	2245	3890	4570	120	120	481	486	6	12	3000	3000	3500	3500	
	2W360	3600	2295	3990	4670	120	120	481	486	6	12	3000	3000	3500	3500	
	2W400	4000	2495	4040	4720	120	120	481	486	6	12	2850	3000	3250	3500	
	2W430	4300	2645	4340	5020	120	120	481	486	6	6	2700	2900	3000	3400	
	2W450	4500	2745	4290	4970	120	120	481	486	6	6	2550	2850	2850	3350	
wide view full 2-stage mast	2F250	2500	1830	2220	2900	1210	560	481	486	6	12	3000	3000	3500	3500	
	2F270	2700	1930	2320	3000	1310	660	481	486	6	12	3000	3000	3500	3500	
	2F300	3000	2080	2620	3300	1460	810	481	486	6	12	3000	3000	3500	3500	
	2F330	3300	2230	3870	4550	1610	960	481	486	6	12	3000	3000	3500	3500	
	2F360	3600	2380	4020	4700	1760	1110	481	486	6	12	3000	3000	3500	3500	
	2F400	4000	2580	4420	5100	2060	1410	481	486	6	12	2850	3000	3250	3500	
wide view full 3-stage mast	3F430	4300	2000	5570	4910	1360	730	495	500	6	6	2550	2850	2850	3350	
	3F450	4500	2080	5750	5070	1460	810	495	500	6	6	2400	2700	2700	3200	
	3F480	4800	2125	6050	5375	1565	915	495	500	6	6	2250	2550	2450	2950	
	3F500	5000	2270	6250	5570	1610	960	495	500	6	6	1650	2250	2300	2800	
	3F550	5500	2350	6830	6150	1770	1120	495	500	3	6	1800	2250	1800	2550	
	3F600	6000	2770	7250	6570	2020	1370	495	500	3	6	1200	2100	1300	2300	

Note:1. With sideshifter minus 200Kg, with integral sideshifter minus 150Kg.

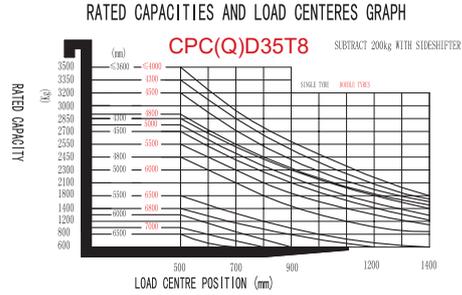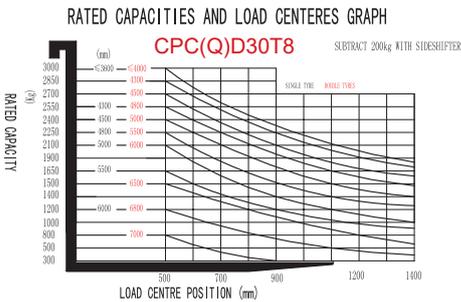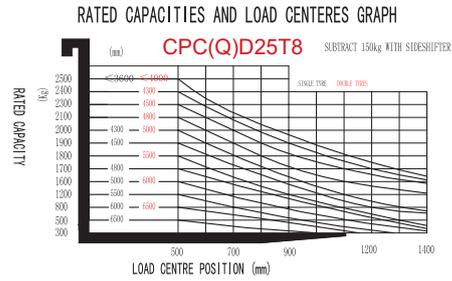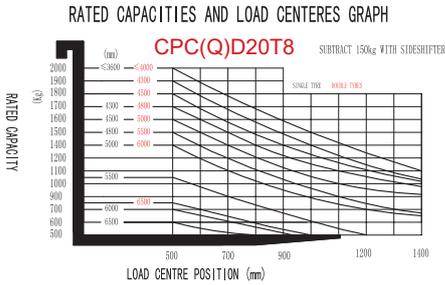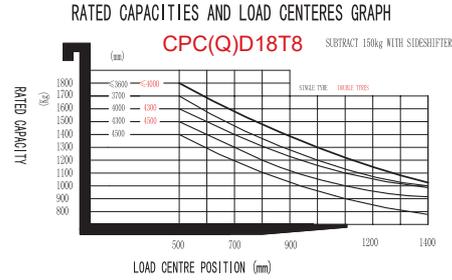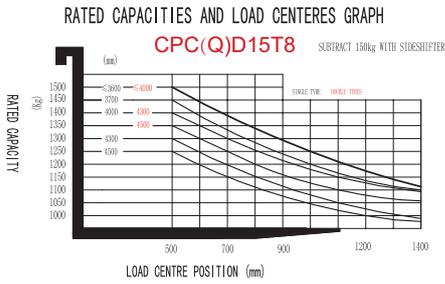

## Option

Options	15/18T8	20/25T8	30T8	35T8
1 Fork length	○	○	○	○
2 Fork extension	○	○	○	○
3 Folded fork	○	○	○	○
4 Imported diesel engine	○	○	○	○
5 Import Gasoline Engine	○	○	○	○
6 LPG system	○	○	○	○
7 High exhaust	○	○	○	○
8 Dual air cleaners or special air cleaner	○	○	○	○
9 Solid rubber tire	○	○	○	○
10 No marking solid tire	○	○	○	○
11 Overhead guard	●	●	●	●
12 Mast options	○	○	○	○
13 Attachments	○	○	○	○
14 Integrated side shift	○	○	○	○
15 Cockpit	●	●	●	●
16 heater	○	○	○	○
17 Front windshield with wiper	○	○	○	○
18 Rear windshield with wiper	○	○	○	○
19 Fan	○	○	○	○
20 Full steel cabin room	○	○	○	○
21 LED front light	●	●	●	●
22 Rear working LED light	○	○	○	○
23 Fire extinguisher	○	○	○	○
24 Suspension seat	○	○	○	○
25 Seat switch	●	●	●	●
26 Warning light	●	●	●	●
27 Insulation mat	○	○	○	○
28 Double front tyre	○	○	○	○
29 OPS system	○	○	○	○

Note: ● standard ○ option — NA

